


Connecting an 1100 Series unit an AIS system

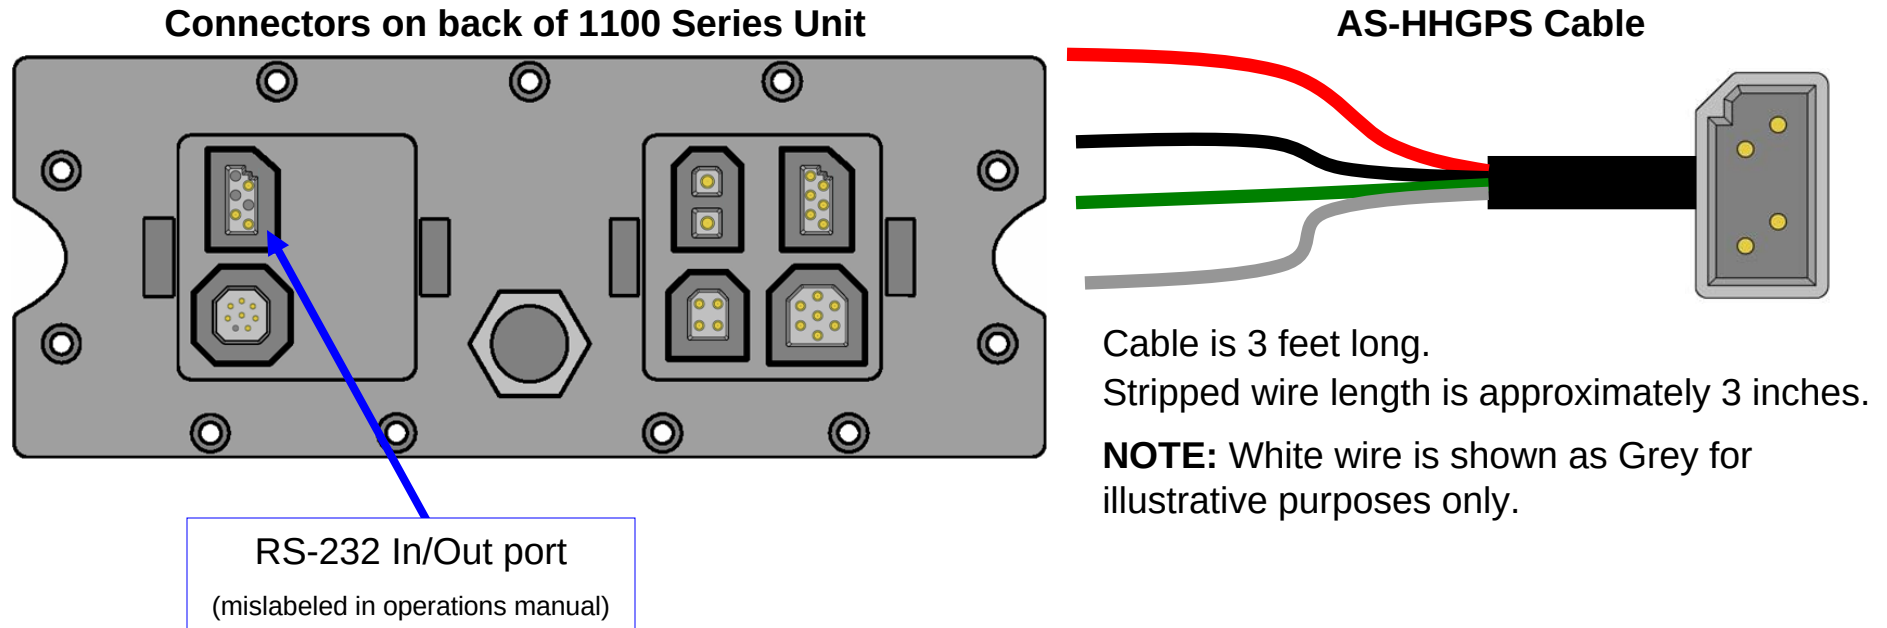

AS-HHGPS Cable Connections:

- Insulate the Red Wire so that it does not make an electrical connection to anything.
- The Black Wire is the RS-232 Ground connection. This should be connected to the Ground connection of the AIS system.
- The Green Wire is the RS-232 Input wire to the unit. This should be connected to the Output connection of the AIS.
- The White Wire (shown here as gray) is the RS-232 Output from the unit. This should be connected to the Input connection of the AIS.

Be sure to set the Tracking Target menu to the "On" setting.

Output Baud Rate is 4800.